


DIXI 7253 CUTINOX

FRAISES À HÉLICE DIFFÉRENTE

FRÄSER MIT UNTERSCHIEDLICHEM DRALLWINKEL


END MILLS WITH DIFFERENT HELIX ANGLES

Z = 3

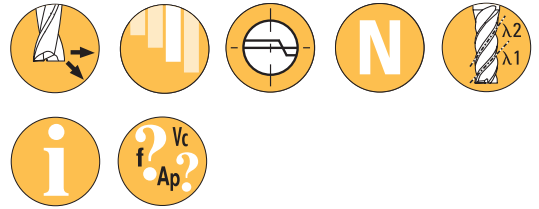

ISO 513: **PMKS**

D ₁	L ₁	D ₂	L ₂	D _{h6}	L	CUTINOX
3.00	4.0	2.80	9	6	57	■
4.00	5.0	3.70	12	6	57	■
5.00	6.0	4.60	15	6	57	■
6.00	7.0	5.50	18	8	72	■
8.00	9.0	7.50	24	10	72	■
10.00	11.0	9.30	30	10	72	■
12.00	13.0	11.20	36	12	83	■
16.00	17.0	15.20	48	16	92	■
20.00	21.0	19.00	60	20	104	■

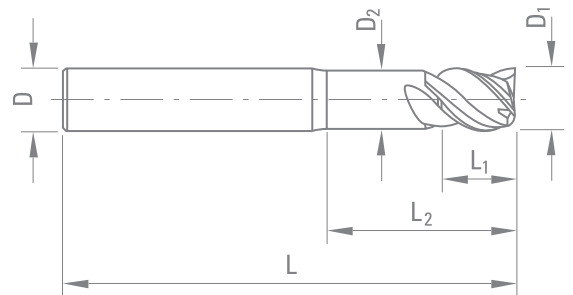

Méplat Weldon selon DIN 6535-HB sur demande.

WELDON-Spannfläche nach DIN 6535-HB auf Anfrage.

WELDON configuration according to DIN 6535-HB on request.