


DIXI 7254 CUTINOX

FRAISES À HÉLICE DIFFÉRENTE

FRÄSER MIT UNTERSCHIEDLICHEM DRALLWINKEL


END MILLS WITH DIFFERENT HELIX ANGLES

Z = 4

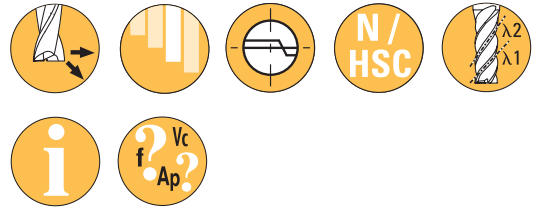

ISO 513: **PMKS**

| D ₁ | L ₁ | D ₂ | L ₂ | D _{h6} | L | CUTINOX |
|----------------|----------------|----------------|----------------|-----------------|-----|---------|
| 3.00 | 4.0 | 2.80 | 9 | 6 | 57 | ■ |
| 4.00 | 5.0 | 3.70 | 12 | 6 | 57 | ■ |
| 5.00 | 6.0 | 4.60 | 15 | 6 | 57 | ■ |
| 6.00 | 7.0 | 5.50 | 18 | 8 | 72 | ■ |
| 8.00 | 9.0 | 7.50 | 24 | 10 | 72 | ■ |
| 10.00 | 11.0 | 9.30 | 30 | 10 | 72 | ■ |
| 12.00 | 13.0 | 11.20 | 36 | 12 | 83 | ■ |
| 16.00 | 17.0 | 15.20 | 48 | 16 | 92 | ■ |
| 20.00 | 21.0 | 19.00 | 60 | 20 | 104 | ■ |

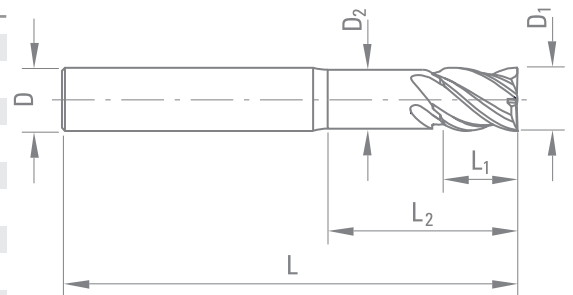

Méplat Weldon selon DIN 6535-HB sur demande.

WELDON-Spannfläche nach DIN 6535-HB auf Anfrage.

WELDON configuration according to DIN 6535-HB on request.