


DIXI 7264 CUTINOX

FRAISES À HÉLICE DIFFÉRENTE
ET PAS DÉCALÉ

FRÄSER MIT UNTERSCHIEDLICHEM DRALLWINKEL
UND UNGLEICHER TEILUNG


END MILLS WITH DIFFERENT HELIX ANGLES
AND IRREGULAR TEETH

Z = 4

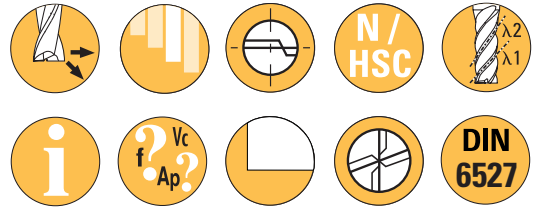

ISO 513: **PMKS**

D_1	L_1	D_{h6}	L	CUTINOX
3.00	8.0	6	57	■
4.00	11.0	6	57	■
5.00	13.0	6	57	■
6.00	13.0	6	72	■
8.00	19.0	8	72	■
10.00	22.0	10	72	■
12.00	26.0	12	83	■
16.00	32.0	16	92	■
20.00	38.0	20	104	■

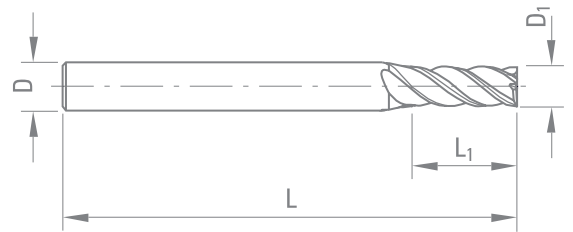

Méplat Weldon selon DIN 6535-HB sur demande.

WELDON-Spannfläche nach DIN 6535-HB auf Anfrage.

WELDON configuration according to DIN 6535-HB on request.